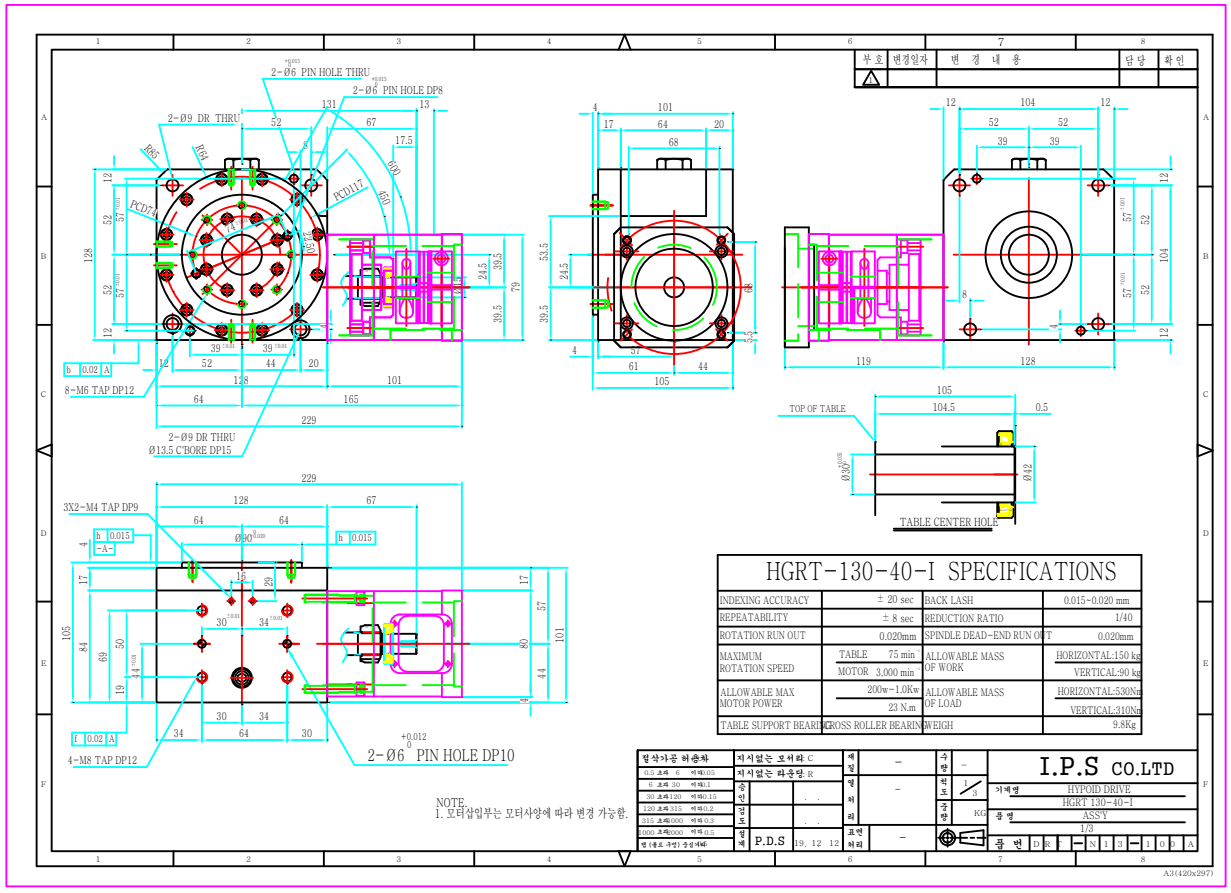

부호	변경일자	변 경 내 용	담 당	확 인

HGRT-130-40-I SPECIFICATIONS

INDEXING ACCURACY	± 20 sec	BACK LASH	0.015~0.020 mm
REPEATABILITY	± 8 sec	REDUCTION RATIO	1/40
ROTATION RUN OUT	0.020mm	SPINDLE DEAD-END RUN OUT	0.020mm
MAXIMUM ROTATION SPEED	TABLE 75 min MOTOR 3,000 min	ALLOWABLE MASS OF WORK	HORIZONTAL:150 kg VERTICAL:90 kg
ALLOWABLE MAX MOTOR POWER	200w~1.0Kw 23 N.m	ALLOWABLE MASS OF LOAD	HORIZONTAL:530Nm VERTICAL:310Nm
TABLE SUPPORT BEARING	CROSS ROLLER BEARING	WEIGH	9.8Kg

NOTE
1. 모터삽입부는 모터사양에 따라 변경 가능함.

일반가공 허용차	
0.5 초과 6 이하	±0.05
6 초과 30 이하	±0.1
30 초과 120 이하	±0.15
120 초과 315 이하	±0.2
315 초과 1000 이하	±0.3
1000 초과 2000 이하	±0.5
별 (참고 주입) 공업규격	

지시없는 모서리	C
지시없는 라운딩	R

재질	–	수량	–
경화처리	–	척도	1/3
표면처리	–	중량	KG

P.D.S 19. 12. 12

I.P.S CO.LTD

기계명	HYPOID DRIVE
품명	HGRT 130-40-1 ASS'Y
품번	DRF-N13-L00A

1/3

A3(420x297)